

TECHNICAL DETAILS

CONSTRUCTION	Shape	Lineair
	Min. Length	300 mm
	Max. length (in one piece)	2000 mm
	Available steps in length	1 mm
	Spigot	Class D spigot with double lip seal
	Volume control	Optional perforated volume flow control disk inside the spigot
	Mounting options	Mounting eyes (Ø7mm) standard, mounting brackets available upon request
MATERIAL	Material	Galvanised (275g/m ²) steel sheet
	Optional insulation	Melamine 6 mm
	Spigot	PP + TPE
	Optional Volume control damper	Galvanised (275g/m ²) steel sheet, perforated
DIFFUSER MOUNTING OPTIONS	Diffuser mounting	Galvanised steel mounting bracket + M5 screws included


SPS

PLENUM BOX WITH MOUNTING BRACKETS FOR SLOT DIFFUSER TYPE SLS

Variations **SPS**



DRAWING

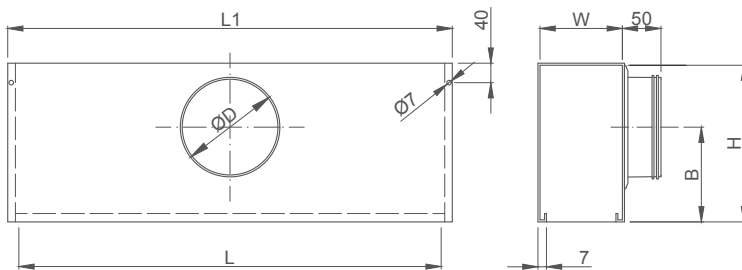

	Number of slots					
	1	2	3	4	5	6
ØD	123	160	200	200	250	250
B	117	150	180	180	205	205
H	200	250	300	300	350	350
W	63	106	149	192	235	278

L= SLOT LENGTH DIFFUSER
 SPS: **L1= L + 35**
 SPS L / SPS R: **L1 = L + 17**
 SPS M: **L1=L**

All dimensions in mm.

HOW TO ORDER

Plenum box for slot diffusers SLS (brackets and screws included)

