

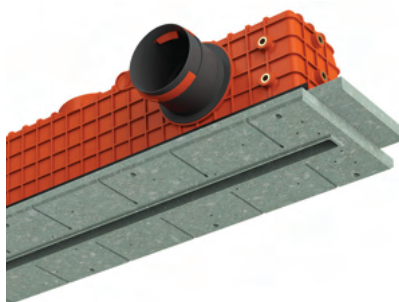


LINEO PRO




Hidden ventilation diffusers
for ceilings & walls



SINGLE model diffuser is fastened to concrete ceiling before the installation of gypsum frame. Fixed 1 m. length, without connection possibility.

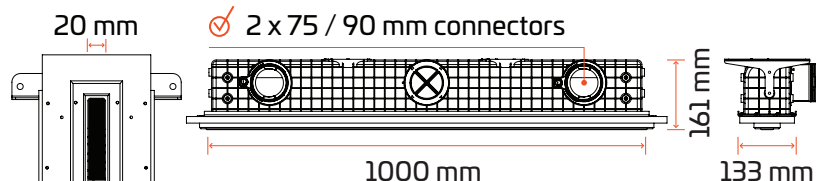


PROFILE model diffuser is attached directly to the gypsum profiles. This model has convenient and fast way of fastening*. Fixed 1 m. length, without connection possibility.

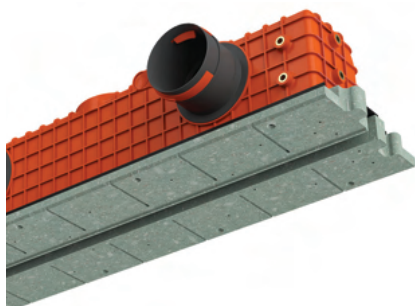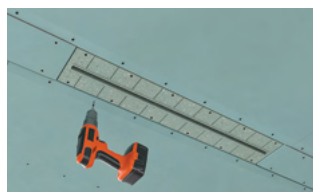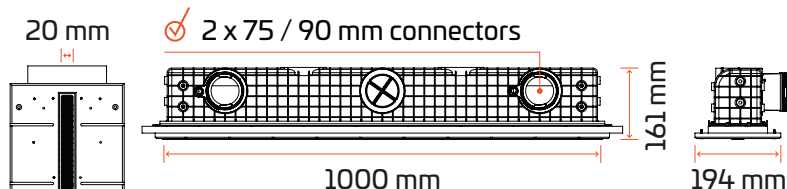

PUZZLE model diffuser is attached to gypsum profiles and can be connected to longer stretches with the use of additional segments. PUZZLE lock technology* allows to connect diffuser segments in a very precise and quick manner.

Patent pending technical solution.

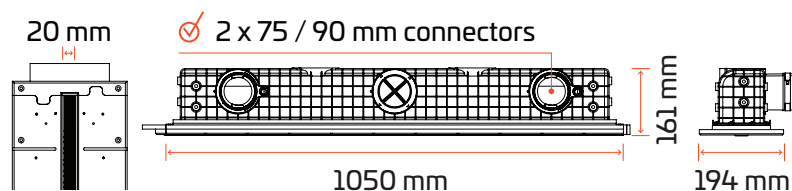

A position of the balancing valve is determined by using a damper balancing stick**:

- ✓ Insert the damper balancing stick through diffuser's grill until it rests against the balancing valve.
- ✓ The readings are determined by the ceiling line.
- ✓ The valve positions are indicated on the stick.

** Balancing flap position rod is included with the diffuser.


D7
D6
D5
D4
D3
D2
D1
D0



D0 – the damper is full opened.
D7 – the damper is maximum closed.

TECHNICAL SPECIFICATIONS FOR ALL LINEO PRO MODELS

(supply air)

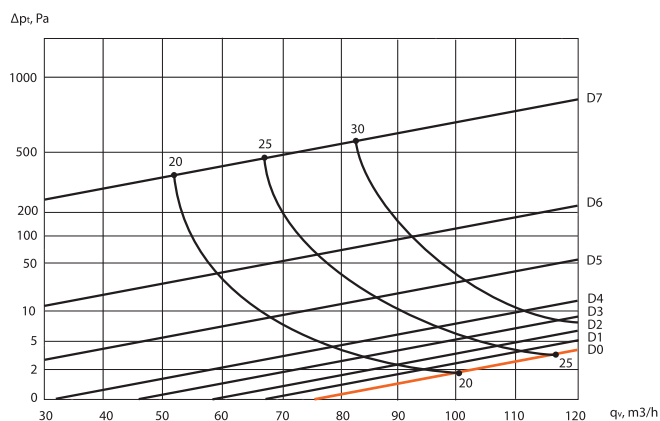

(extract air)

